


VWS – starter track PVC PREMIUM



- thermal bridge free plinth weathering
- flexible use for insulation thicknesses of 100 - 160 mm
- little place requirement in stock as only 2 profiles for 100 - 160 mm
- easy installation of the base track by standard hole pattern for wall mounting
- no interfering mesh flag when setting the insulation board
- easy insertion of the combined bellcast bead through an optimal notch on the PVC base profile
- mounting without connection pieces for starter tracks by shifted assembling of the two profiles
- neatly plaster completion by extraction of the combined bellcast bead
- optimal plaster fixation by mesh flag of the combined bellcast bead

thermal bridge free

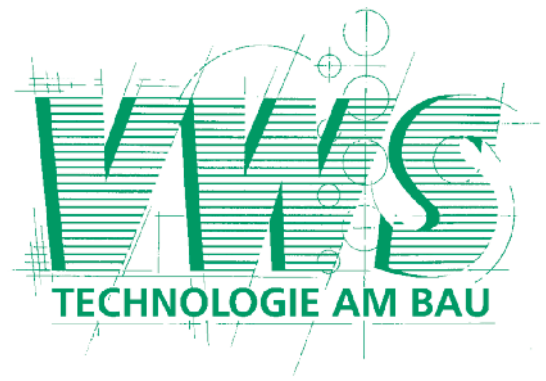